FITTING INSTRUCTIONS

MAKE: TRIUMPH SPEED TRIPLE 1050S (16-20)
PART: NITRON R3 WITH HPA
PART NO: NBKT26_

NITRON® SUSPENSION

INSTALL NOTES:

If your shock is fitted with the optional preload adjuster, it should be mounted so that the hose exits the hydraulic cylinder on the right hand side of the shock body. The adjuster body should then be mounted with the supplied bracket to the underside of the right hand side pillion footrest hanger as shown.

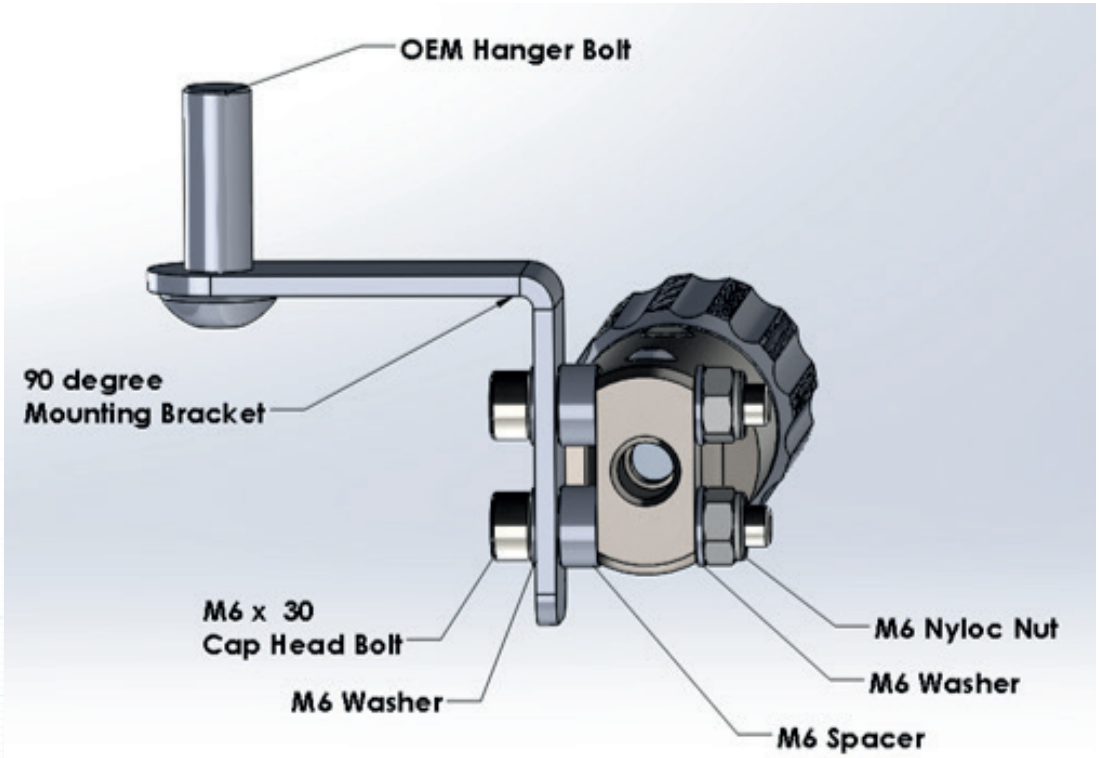

For more information, get in contact
+44 (0)1993 849 449 | +1 (951 696-1111 | sales@nitron.com